

# Design and Implementation of instant water cooler using Thermoelectric Module

Akhil R. Thakre

RTMNU's OCE, Department of PGDIR

Date of Submission: 30-08-2020

Date of Acceptance: 16-09-2020


**ABSTRACT:** Hot and cold water is always needed for human being; different systems are used to get hot and cold water. The devices which are available in market for heating and cooling purpose have more cost and size of those systems is more. e.g. refrigerator, electric heater and solar water heater. In this current paper, peltier effect is used to get cold as well as hot water simultaneously with cheapest cost and applicable to used in residential area also. This project is developing a system which will provide cooling and heating effect simultaneously without moving mechanical parts. Thermoelectric cooling and heating system does not require working fluids. This device can be used to cool water without use of refrigerants. And simultaneously heating can be achieved from the hot side of thermoelectric module to heat the water, this is due to heat absorption and rejection using peltier element. This small design is very useful in elimination of CFC and it would replace conventional refrigeration system. In this study experimentally Tests were carried out to determine the time taken for the temperature of 250ml of water in a glass jar to be reduced from 40°C to below 16°C. The result shows the cool water and heat water.

**KEYWORDS:-**Thermoelectric cooler element, heat exchanger, peltier element, Thermal paste, Heat sink

## I. INTRODUCTION

A thermoelectric module also called as thermoelectric cooler or Peltier cooler, is a semiconductor-based electronics component that functions as a small heat pump, moving heat from one side of the device to the other. Thermoelectric coolers was operate according to the Peltier effect. This effect is creates a temperature difference by transferring heat energy between two electrical junctions. A voltage is applied across the joined conductors to create an electric current. When the current passes through the junctions of the two conductors, heat is removed at one junction and

cooling process is applied. Heat is deposited at the other junction. The main application of peltier effect is cooling. However the peltier effect can also be used for heating or control of temperature. In every case, a DC voltage is required.

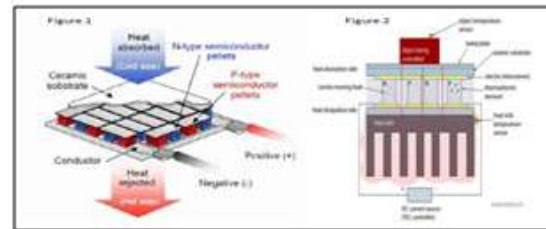

A water dispenser, known as water cooler (if used for cooling only), is a machine that cools or heat up and dispenses water with a refrigeration unit. Water dispensers was available in a variety of form factors, ranging from wall mounted to bottle filler water dispenser combination units, to bi-level units and otherformats. The instantaneous water cooler employs a bottle or reservoir for storing water to be cooled. No city main inlet connection is required as it is normally used to cool water supplied in 25lit glass bottles, which are placed on top of the unit. Bottled water dispensers typically use 5 or 10 gallon dispensers commonly found on top of the unit. Pressure coolers are subcategory of water dispensers encompassing drinking water fountains and direct-piping water dispensers.

In the instant water cooler water is cooled instantly using thermoelectric module. Thermoelectric element based on peltier effect. The thermoelectric module gives one side heating and another side cooling. For heating side we can use heat sink, heat pipe, etc... and remove the heat towards atmosphere and increases the cooling effect. On the thermoelectric module thermal paste is applied and for cooling side mounted heat exchanger for supplied water from source take inlet of water and another side outlet of cool water. And for another side (heating side) used heat sink or heat pipe, heat exchanger and maintain the temperature difference. By using this process water

get cooled instantly and for all this process called as instant water cooler using thermoelectric cooler.

**What is Thermoelectric Cooler**

The thermoelectric module called as thermoelectric cooler or peltier element. Thermoelectric cooling system is a green alternative to HFC refrigerant that uses a solid state device that acts as a heat pump to transfer heat from one side of the device to another using the Peltier effect. It is made up of numerous pairs of semiconductors enclosed by ceramic wafers. Thermoelectric coolers is using direct current power rather than refrigerant gas and a compressor and have no moving parts or complex assemblies.




A standard module consists of any number of thermocouples connected in series and sandwiched between two ceramic plates. When current is passes through the module one ceramic plate is heated while the other is cooled. The current direction is in which plate is cooled. The number and size of the thermocouples and the materials used in the manufacturing determine the cooling capacity of the project. Cooling capacity changes from fractions of Watts up to many hundreds. Many types of TEC modules are like single stage, two stage, three stage, four stage, centre hole modules etc...

**Principle of Thermoelectric cooler**

The thermoelectric cooler based on these three principle- The Seebeck, Peltier, and Thomson Effects, together with several other phenomena, form the basis of functional thermoelectric modules. The thermoelectric cooler based on peltier effect.

**PELTIER EFFECT:**The thermoelectric module called as peltier effect. If we modify our thermocouple circuit to obtain the configuration shown in Figure, it will be possible to observe an opposite phenomenon known as the Peltier Effect. When a voltage ( $V_{in}$ ) is applied to terminals  $T_1$  and  $T_2$  an electrical current ( $I$ ) will flow in the circuit. As a result of the current flow, a slight cooling effect ( $Q_c$ ) will applied at thermocouple junction A

where heat is absorbed and a heating effect ( $Q_h$ ) will occur at junction B where heat is expelled. Note that this effect may be reversed when a changes in the direction of electric current flow will reverse the direction of heat flow. The Peltier effect will be expressed mathematically as:  $Q_c$  or  $Q_h = pxy \times I$

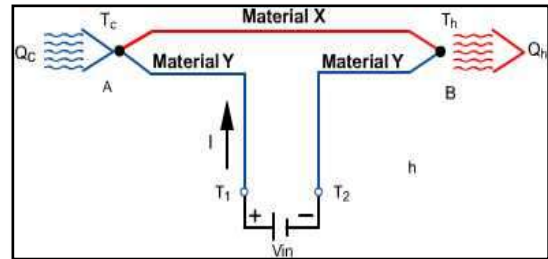

**II. PROBLEM STATEMENT**

According to season human needed cold water and hot water. In households refrigerator used for cooling water. And the water takes more than 5 to 6 min for cooling. Space also required more, weight of refrigerator is in between 90 and 181 kg. And the cost of refrigerator is high.

The water dispenser seen in Industry, malls, offices, hospitals, etc... Those water cooler used storage system, And the cooling capacity is more. In household those water cooler not used because it is very costly, and more space required. Hence the thermoelectric element is easily available in market and light weight. By using this element water is cool. And used these water in for household. for It has become commonplace for households to purchase these water dispensers so that you need not have to worry about refilling the water bottles in the fridge. You can use your glass of refreshing cold water directly from the tap. Hence, The instant water cooler is required less space, compact in size, less time require for cooling water, more efficient.

**III. DESIGN AND CALCULATION**

Known data:

When I used the thermoelectric cooler according to their capacity requirement is calculated. Calculate current and power for cooling 200ml of water in 30sec. According to Thermoelectric element TEC1-12706 properties are: Specification of thermoelectric element.

Specification TEC1-12706

	Minimum	Maximum
Hot Side Temperature (°C)	25	50
Qmax (Watts)	50	57
Delta Tmax (°C)	66	75
I <sub>max</sub> (Amps)	6.4	6.4
V <sub>max</sub> (Volts)	14.4	16.4
Module Resistance (Ohms)	1.98	2.30

The dimension of TEC1-12706 element is L\*B= 40\*40mm, height = 3.6mm, weight = 30gm

**1) Power calculation**

Power (P) = Current (I)\* (voltage)V

P =Heat (Q)/Time (T) unit in watt

**P= Q/30 in watt** .....equation (1)

**2) Heat Calculation**

Q= mass (m)\*Specific heat of water (C<sub>pw</sub>)\*(T<sub>h</sub>-T<sub>c</sub>) unit in joules

According to summer temperature inside in room as Consider, T<sub>h</sub>=40 degree celcius

By experimental testing on 10 people and requirement of cooling water temperature for drinking is, T<sub>c</sub>= 16 degree celcius.

Where, T<sub>h</sub>= hot side temperature and T<sub>c</sub>= Cold side Temperature

Mass of water or amount of water cool, m=200ml=200gm=0.20kg

Time, t= 30second

Q= 0.2\*4.18\*(40-16)

**Q= 20092.8Joule**

P=q/t Joule/s or watt

P=20092.8/30

**P=669.76watt (assume 700watt)**

Heat rejected at hot side is given by

Q<sub>h</sub> = mC<sub>p</sub>(T<sub>h</sub>-T<sub>c</sub>)

Q<sub>h</sub>= Q= 20092.8Joule

Q<sub>c</sub>= Q<sub>h</sub>-P

**Q<sub>c</sub>=19392.8 joule**

Voltage Of 12v From Peltier Element and power supply =700watt

Then,

P=I\*V

I=P/V=669.76/12

**I=58.33 Amp (assume 60amp)**

Hence,

Power Supply =700watt

Current=60Amp

Hence, for water cooling of 200ml in 30sec for that power required 700watt and current is 60amp. The cooling of water is depend upon the power, current and extraction of heat from the surface of heating.

**3) Design the Heat Exchanger**

According to the thermoelectric cooler dimension length, width and height of the heat exchanger is decided. The thickness of the strip will be 0.05cm




**Fig. Thin sheet**

For one heat exchanger dimensions are, Length \*width\*height =12\*4\*0.05cm

Inside the length of 12cm number of strips will be 24 number.

Boarder dimensions are

12\*0.5\*0.05cm for four walls

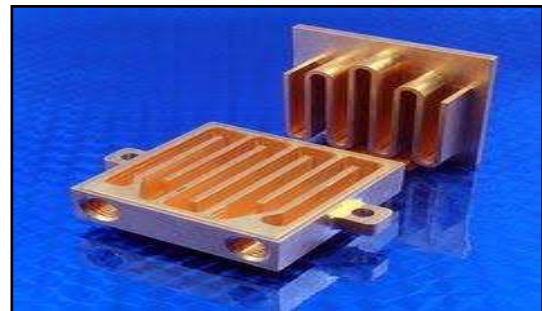


**Fig. Heat Exchanger**

**IV. WORKING PRINCIPAL**

Working of TE water cooler is same as that of normal cooler. In normal water cooler water cooled by using refrigerant but in this TE cooler water is cooled by thermoelectric cooler element. Inside the thermoelectric cooler semiconductor arranged when we gives the power supply so the electrons moves positive to negative and vice versa and by this process one side heating and another side cooling is generated. The thermoelectric cooler is mostly used for the cooling.

Experimental setup shown in Fig. consists of the following components: 1. Thermo Electric Module, 2. Heat pipe, 3. Insulation material, 4. Thermal paste, 5. Insulation tape, 6. Valve, 7. Pipe, 8. Power supply.

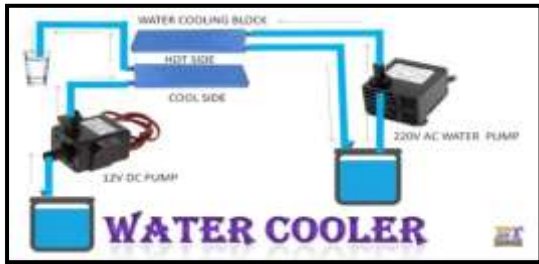

**Fig- Block Diagram**

The thermoelectric cooler element or peltier element TEC1-12706 and apply both side thermal paste properly. One heat exchanger mount on cold side and another side (heating side) also mount heat exchanger. After that insulated the assembly part using thermal insulated tape because heat is not transfer from one side to another. **Insulation used for cold side because heat is not dissipated to atmosphere.** Material of insulation is used thermocoal. Connect the pipe hot and cold side, one side get input and another side get output. On the both side of inlet hot and cold used valve for controlling flow one side high and another side low for required water cooling is get fast, and for analysis purpose also, used temperature meter for checking water temperature and then, connect the power supply and take the reading.

When power supply is on thermoelectric cooling element one side heated and another side gets cooled. By using **conduction** process the heat transfer in the heat exchanger water is flowing inside of pipe the baffle plate is working as obstacle and helps for increasing cooling rate. From the source water is takes and provides inside the heat exchanger both the side through pipe and by using baffle plate water helps to circulate and took sometimes to cool water with simultaneously heating side also same process follows. When temperature difference is less cooling rate is more. Heat is removed more in terms of hot water and cooling water efficiency increases.

One of the biggest drawbacks is hot water and cold water get simultaneously. This system design for cold water if you not required hot water but you get with cold water hence this hot water used for cooking, and if you not need so preserved in thermos box.



**Fig. Experimental setup for instant cold water**



**Fig. Experimental setup for instant hot water**

#### ADVANTAGES

- Total weight of the system is less.
- Less space required.
- Cost of the system is less.
- Noiseless.
- More efficient.
- Easy to manufacture.

#### SCOPE


- The thermoelectric cooler element used for generating electricity like in thermal power plant.
- Improve rate of refrigeration and coefficient of performance at minimum cost of operation.
- The power supply to a thermoelectric cooler can be obtained from a thermoelectric generator or solar energy.
- The thermoelectric element used in cooling : 1) Medical field, Industrial area, etc..



### V. RESULTS

Sr. No.	Time in sec	Cold water temperature in oC	Hot water temperature in oC
1.	0	27	27
2.	5	25	29
3.	10	23	31
4.	15	19	34
5.	20	16	36
6.	25	15	37
7.	30	14	38

### GRAPH

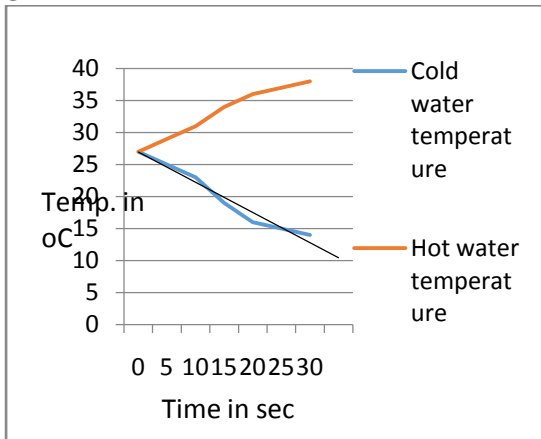

### VI. CONCLUSION

The thermoelectric cooling and heating system for water cooler and heater (Water dispenser) is working with satisfactory conditions. This system produces hot and cold water simultaneously. It is a solid state heat transfer system which requires no use of refrigerants When open the valve for cold side, get both water simultaneously if you not required.

hence there is no emission of CFC. In the paper arrangement is effective and maintain the temperature difference with these minimize the cost.

And the objective of the project 250ml of water cools in 30sec is satisfactory.

### REFERENCES

- [1]. Kaseb S., El-hairy G, Electronics Cooling, Mechanical Power Engineering Department, Faculty of Engineering, Cairo University, Egypt .
- [2]. H. Sofrata, "Heat rejection alternatives for thermoelectric refrigerators," Energy Conversion and Management, vol. 37, pp. 269-280, 1996
- [3]. Enescu D, Virjoghe EO, A review on thermoelectric cooling parameters and performance, Renewable and Sustainable Energy Reviews , 2014, 38:903–916.
- [4]. Goldsmith, H.J. , Introduction to thermoelectricity, Springer-Verlag Berlin Heidelberg 2010.
- [5]. D. Zhao, G. Tan, A review of thermoelectric cooling: materials, modeling and applications, Applied Thermal Engineering (2014), doi: 10.1016/j.applthermaleng.2014.01.074.
- [6]. S. Riffat, X. ma, Improving the coefficient of performance of thermoelectric cooling systems, international journal of energy research Int. J. Energy Res. 2004; 28:753–768.
- [7]. J. Vian, D. Astrain, “Development of a heat exchanger for the cold side of a thermoelectric module”, Applied Thermal Engineering 28 (2008) 1514–1521.
- [8]. <https://www.electroniccooling.com/2003/05/anintroduction-to-pulsating-heat-pipes/>
- [9]. "Intermediate Temperature Heat Pipe Life Tests and Analyses". [www.lact.com](http://www.lact.com).
- [10]. "Heat Pipes", Fifth Edition, D. A. Reay, P.A. Kew.
- [11]. M A Ahamat& M. J. Tierney, Timewise temperature control with heat metering using a thermoelectric module, Applied Thermal Engineering 31 (2011) 1421-1426