

Experimental Investigation on Concrete with Replacement of Fine Aggregate from Scrap Tyre Rubber Dust

*Bharath V B *Kuldeep Singh Solanki * Savitha S Biradar * Manish Yadav

**Assistant Professor, Department of Civil Engineering, Pratap University, Jaipur, Rajasthan, India*

**HOD, Department of Civil Engineering, Pratap University, Jaipur, Rajasthan, India.*

**HOD, Department of Civil Engineering, Raman Polytechnic, Bangalore, Karnataka, India.*

**8th Sem B tech Student, Department of Civil Engineering, Pratap University, Jaipur, Rajasthan, India*

Date of Submission: 14-06-2020

Date of Acceptance: 30-06-2020

ABSTRACT

Concrete is the most widely used construction material in the world in which cement and aggregates are the main constituents. This has led to continuous and increasing demands of natural materials used in there construction. Present study aims to explore the potential utilization of scrap tires rubber in various Portland Cement Concrete categories for the production to study the structural behavior of concrete, and to help partially solving environmental problem produced from disposing waste tires. Raw materials of coarse and fine aggregate used in present study were tested, fine aggregate (sand) was replaced by scrap tire rubber dust of size 595 μ , 250 μ and 195 μ with 5%, 10% and 15% respectively for three grades of concrete (M25, M30 and M35). Compressive strength test was done on hardened concrete and conclusions.

KEYWORDS: Concrete, Coarse Aggregate, Compressive Strength, Pumice aggregate, Light weight concrete.

I. INTRODUCTION

Concrete is the major material for the construction of the building. In this time, waste materials available easily. Fly ash, coconut shell, silica fume, plastic waste and waste tyreetc.

materials present in the bulk quantity. These materials are hazardous for the environment so to reduce these quantities of the materials, use it in the concrete. Concrete is the mixture of coarse aggregate, fine aggregate, cement and water but use this type of materials to get the optimum strength. By using these materials, its beneficial for the environments and reduce the cost of the concrete. These materials are waste materials so the cost of the materials is also less. If the concrete makes with these material so the cost of the concrete is also less as comparison to the normal concrete. Using the waste tyre material, which can be used either in the road pavement or concrete, is beneficial for the consumption of the wastes. This material uses in the present study and check the effect on the mechanical strength of the concrete.

II. MATERIAL USED

1. Cement

The cement taken was Ordinary Portland Cement (Abuja cement) of 43 grade of uniform consistency, conforming to IS 8112- 1989. The test for specific gravity, standard consistency, initial and final setting time and 28 day compressive strength have been conducted Table 1

Table 1: Physical Properties of Ordinary Portlandcement

Sr.No.	Characteristics	ValuesObtained	StandardValues
1.	SpecificGravity	3.21	-
2.	NormalConsistency	32%	-
3.	Initial SettingTime	92 minutes	Not to be less than 30minutes
4.	Final SettingTime	200 minutes	Not to be greater than 600minutes

2. Rubber Aggregate

Finely grounded tyre rubber from which the fabric and steel belts have been removed has a granular texture and ranges in size from very fine powder to sand-sized particles were used as fine rubber aggregate. The size of rubber aggregates were 595 μ, 250 μ and 177 μ.

3. Fine Aggregate

The fine aggregate (river sand- Badarpur) used in the experimental work is locally procured. Sieve analysis of the fine aggregate was carried out in the laboratory as per IS 383-1970, and the results are tabulated in Table 2.

Table 2: Physical Properties of Fine Aggregate

Characteristics	Type	Specific gravity	Fineness Modulus	Grading Zone	Water absorption
Value	Natural Sand	2.72	2.59	II	1.07%

4. Coarse Aggregate

The aggregates which are retained over IS sieve 4.75mm are called as coarse aggregate. The coarse aggregate used in the present study was locally

available crushed stones of maximum size of 10 mm. Specific gravity and other physical properties of coarse aggregates are given in Table 3.

Table 3: Physical Properties of Coarse Aggregate

Characteristics	Colour	Shape	Maximum Size	Specific Gravity	Fineness Modulus	Water absorption
Value	Grey	Angular	20 mm	2.65	6.66	.95%

5. Super Plasticizer

Workability of concrete decreased with the increase in pond ash content, which is incorporated by using super plasticizer. In this study Forsook SP430 super plasticizer is used.

10262:2000 adopted for the M-40 grade of concrete. The ratio of the ingredients material is 1:2.07:2.65 and the water/cement ratio is 0.40 for all the mix proportions. The concrete specimens are prepared with pond ash for the M 40 grade of concrete. Three cubes of each variation of pond ash are casted and the average of three test results is taken for the accuracy of the results.

Concrete mix design

The mix design of conventional concrete having the design procedure as per given in IS

Table 4: Mix Design of Concrete

Material	M25	5% replacement	10% replacement	15% replacement
Cement(kg)	330.00	330.00	330.00	330.00
Fine aggregates(kg)	804.31	764.09	723.88	683.66
Coarse aggregates(kg)	1255.80	1255.80	1255.80	1255.80
Water(ltr)	148.50	148.50	148.50	148.50
Super plasticizer(kg)	1.65	1.65	1.65	1.65
Rubber(kg)	NIL	40.22	80.44	120.65

Compressive strength of concrete

The compressive strength is calculated from the failure load divided by the area resisting the load and reported in Megapascals (MPa) in SI units. In this study the compressive strength of the concrete cubes are determined after 28 days and 56 days of normal curing. From the results of

compressive strength it can be seen that the decrease in strength for M25 grade of concrete after 5% replacement of fine aggregate is 9.3%, 11.4% and 18.9% for scrap tyre rubber. There are three types size of aggregate which are No 1 for 595 μ, No. 2 for 250 μ, and No. 3 for 177 μ.

Table 5: Strength of M25 mixes with 5% tyre dust of different sizes

SL no.	Sample	Grade of concrete	% tyre rubber dust	28 days strength(MPa)	56 days strength(MPa)
1.	Set 1-1	M25	0	26.76	33.47
2.	Set 1-2	M25	5	24.48	30.61
3.	Set 1-3	M25	5	23.95	29.91
4.	Set 1-4	M25	5	21.36	27.41

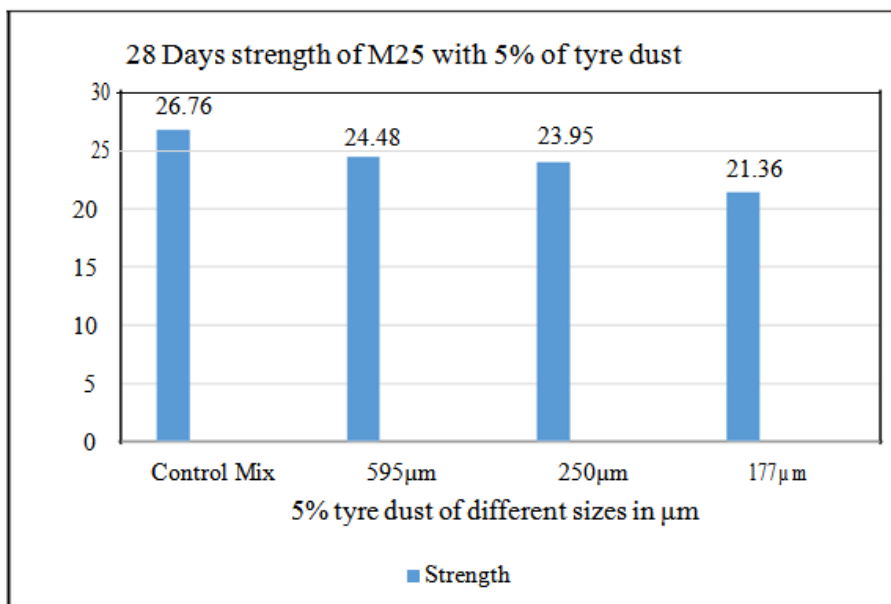


Figure 1: 28 Days strength of M25 with 5% tyre dust of different sizes

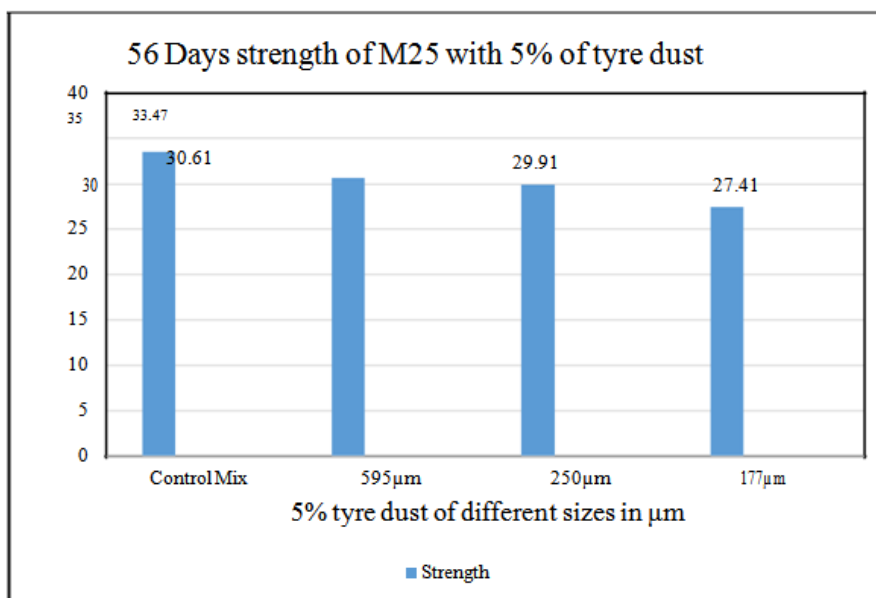


Figure 2: 56 Days strength of M25 with 5% tyre dust of different sizes

Table 6: Strength of M25 mixes with 10% tyre dust of different sizes

SL no.	Sample	Grade of concrete	% tyre rubber dust	28 days strength(MPa)	56 days strength(MPa)
1.	Set 2-1	M25	0	26.76	33.47
2.	Set 2-2	M25	10	22.69	28.64
3.	Set 2-3	M25	10	21.89	26.41
4.	Set 2-4	M25	10	19.48	25.78

From the results of compressive strength it can be seen that the decrease in strength for M25 grade of concrete after 10% replacement of fine aggregate is

14.4%, 21.09% and 22.9% for scrap tyre rubber dust

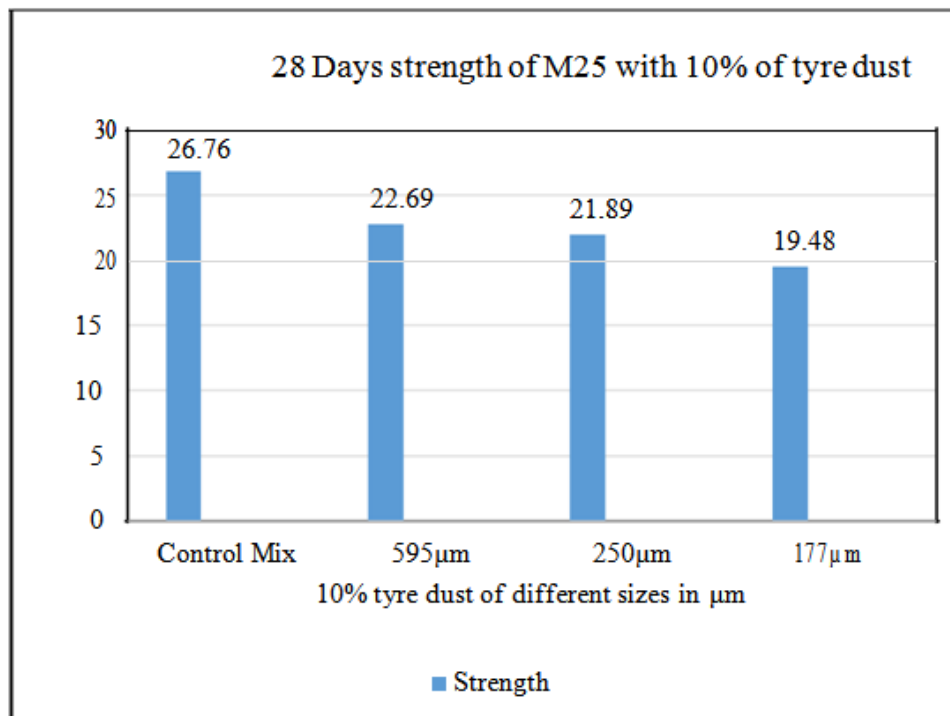


Figure 3: 28 Days strength of M25 with 10% tyre dust of different sizes

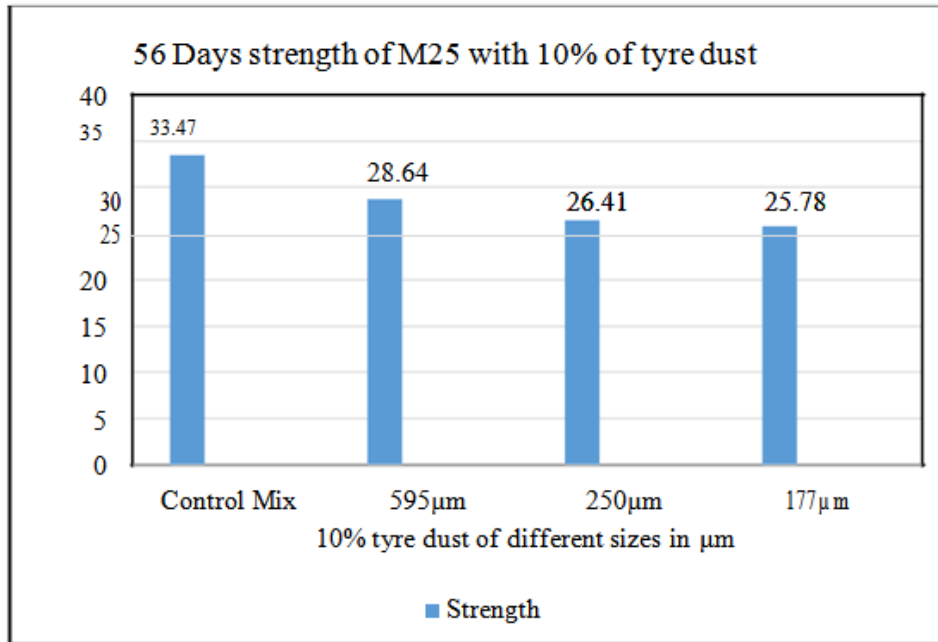


Figure 4: 56 Days strength of M25 with 10% tyre dust of different sizes

Table 7: Strength of M25 mixes with 15% tyre dust of different sizes

SL no.	Sample	Grade of concrete	% tyre rubber dust	28 days strength(MPa)	56 days strength(MPa)
1.	Set 3-1	M25	0	26.76	33.43
2.	Set 3-2	M25	15	19.54	25.48
3.	Set 3-3	M25	15	16.25	23.57
4.	Set 3-4	M25	15	14.87	21.56

From the results of compressive strength it can be observed that the decrease in strength for M25 grade of concrete after 15% replacement of fine aggregate is 23.7%, 29.40% and 34.41% for scrap tyre rubber.

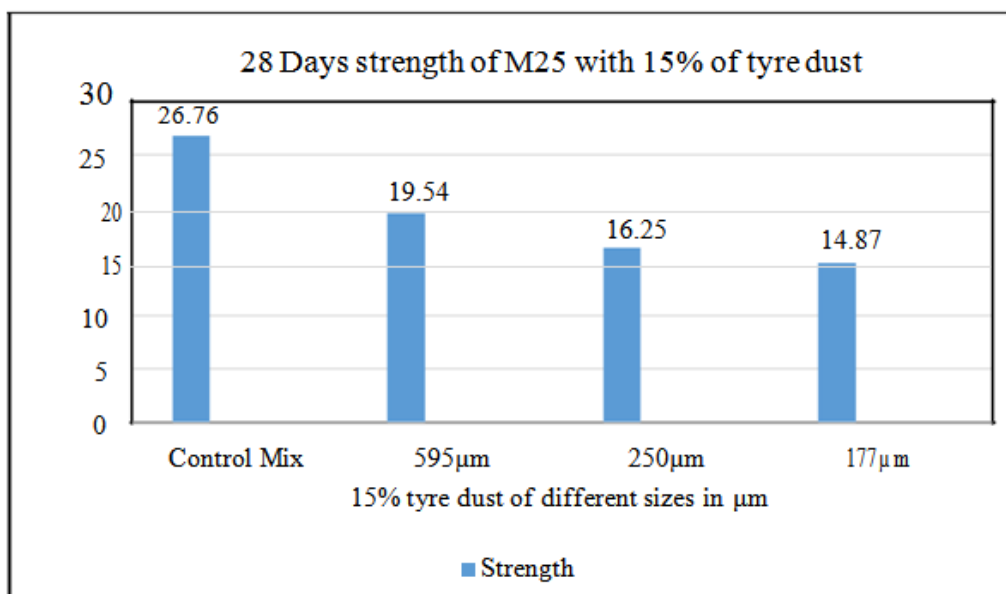


Figure 5: 28 Days strength of M25 with 15% tyre dust of different sizes

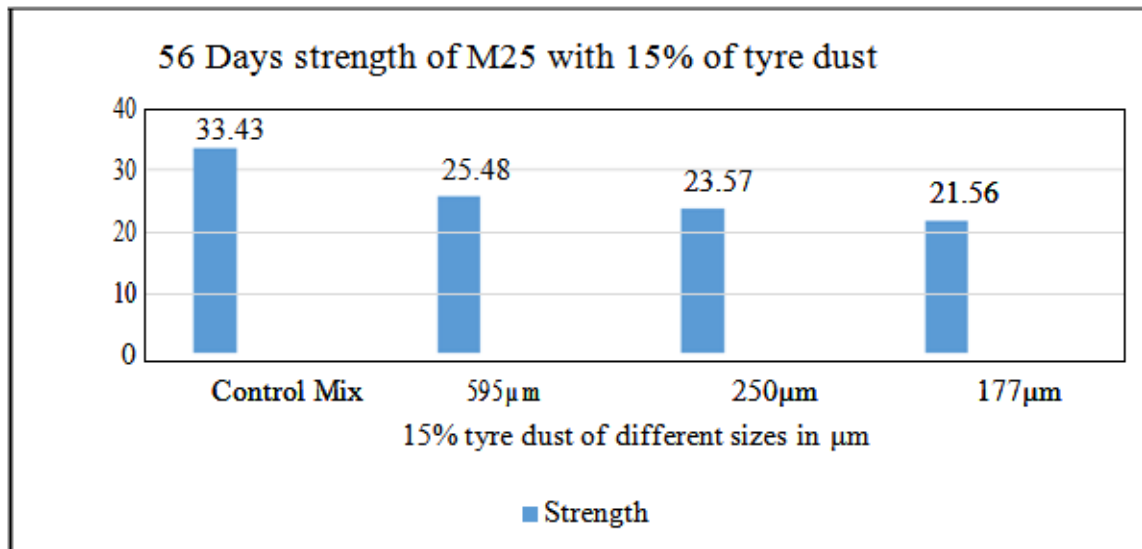


Figure 6: 56 Days strength of M25 with 15% tyre dust of different sizes

III. CONCLUSION

From the results obtained from present study it can be further concluded that:

The test result shows the increase in rubber dust content decrease the compressive strength of concrete significantly. The compressive strength decrease 25.38%, 37.37 % and 79.95% at 28 days respectively and 22.10, 29.82 and 55.05% decrease respectively after 56 days for 177 μm .

The reason for the decrease in the compressive strength can be due to poor bonding of scrap tyre rubber particles with the other particles which makes rubber particles behave as voids resulting in the decrease in compressive strength.

The compressive strength of concrete also decreases with the decrease in the particles size of rubber aggregate so it is intended to use the rubber aggregate of comparatively larger particle size to replace the fine aggregate.

REFERENCES

- [1]. Dumne S.M, (2013), An experimental study on performance of recycled tyre rubber-filled concrete, *International Journal of Engineering Research & Technology*, 2278-0181.
- [2]. Eldin N., Senouci B., (1993), Rubber-tire particles as concrete aggregates, *ASCE Journal of Materials in Civil Engineering*, 5, 478-496.
- [3]. Fattuhi I., Clark A., (1996), Cement-based materials containing tire rubber, *Journal of Construction and Building Materials*, 10, 229-236.
- [4]. Gupta P., Gupta R.C., Thomas B.S., (2012), Utilization of copper slag and discarded rubber tyres in construction, *International Journal of Civil and Structural Engineering*, 3, 0976-4399.
- [5]. Hossain, Sadeq M., Funk M., Maag R., (1995). A study of chunk rubber from recycled tires as a road construction materials, *Proceedings of the 10th Annual Conference on Hazardous Waste Research, Kansas State University, Manhattan*, 188-197.
- [6]. IS: 456-2000: Code of practice- plain and reinforced concrete, Bureau of Indian Standard, New Delhi-2000.
- [7]. IS: 10262-1982 (Reaffirmed 2004): Recommended guidelines for concrete mix design, Bureau of Indian Standard, New Delhi-2004.
- [8]. IS: 8112-1989 (Reaffirmed 2005): Specification for 43 Grade Ordinary Portland cement, Bureau of Indian Standard, New Delhi-2005.
- [9]. IS: 9103-1999 (Reaffirmed 2004): Concrete Admixtures-Specifications, Bureau of Indian Standard, New Delhi-2004.
- [10]. IS: 383-1970: Specification for Coarse and Fine Aggregates from Natural Sources for Concrete, Bureau of Indian Standard, New Delhi-1970.
- [11]. Kotresh M., Belachew M., (2014), Study On Waste Tyre Rubber As Concrete Aggregates, *International Journal of Scientific Engineering and Technology*, 4, 433-436.
- [12]. Pierce E., Blackwell C., (2003), Potential of scrap tire rubber as lightweight aggregate in

- flowable fill, *Waste Management*, 23, 197–208.
- [13]. Shtayeh S.M.S., (2007), Utilization of Waste Tires in the Production of Non- Structural Portland Cement Concrete, *Waste Management*
- [14]. Topcu.B., Avcular.N, (1997), Collision behaviors of rubberized concrete, *Cement and Concrete Research*, 1893–1898.
- [15]. Twumasi B., Richard, (2014), Ground Tire Rubber as a Component Material in Concrete Mixtures for Paving Concrete, *Electronic Theses, Treatises and Dissertations*, 9107.
- [16]. Kumar, Pradeep, et al. "Experimental Process of Tungsten Inert Gas Welding of a Stainless Steel Plate." *Materials Today: Proceedings* 2.4-5 (2015): 3260-3267.
- [17]. Mishra S, Kumar A, Mishra RK, Sharma S. Structural health monitoring and Propagation of lamb waves to identification of crack. *Materials Today: Proceedings*. 2015 Jan 1;2(4-5):1833-40.

Atiqullah Pirzada, et. al. "Experimental Investigation on Concrete with Replacement of Fine Aggregate from Scrap Tyre Rubber Dust." *International Journal of Advances in Engineering and Management (IJAEM)*, 2(1), 2020, pp. 376-382.